

ACT-7T Bodypack Transmitter

Key Features

- Sturdy, compact magnesium alloy housing.
- ACT™ syncs the transmitter and receiver frequency automatically.
- Pilotone squelch for interference-free operation.
- Built-in transmitter gain adjustment.
- Impedance selectable switch for microphone or guitar.
- 4-pin mini XLR connector is compatible with all MIPRO lavalier, headworn microphones and instrument cable.
- Silent on/off switch.
- 4-segment battery status meter.
- LCD displays group, channel & error message code.
- 20-hour battery life per 2 'AA' alkaline batteries.
- 100m (330ft.) operating range.
- 100% made in Taiwan.

Microphones


MU-13	Single-sided Earworn Microphone (beige)
MU-23	Omni-directional Headworn Microphone (beige, fixed connector)
MU-23d	Omni-directional Headworn Microphone (beige, detachable cont)
MU-210	Uni-directional Headworn Microphone (beige, fixed connector)
MU-210d	Uni-directional Headworn Microphone (beige, detachable cont.)
MU-53L MU-53LS	Uni-directional Lavalier Microphone (black beige)
MU-55L MU-55LS	Omni-directional Lavalier Microphone (black beige)
MU-53HN MU-53HNS	Uni-directional Headworn Microphone (black beige)
MU-55HN MU-55HNS	Omni-directional Headworn Microphone (black beige)

Accessories

ASP-10	Aerobics Bodypack Pouch (Neoprene)
MU-40G	Instrument Cable
TC-18	Transmitter Shielding Storage Case

Technical Specifications

Oscillation Mode	PLL Synthesized
Frequency Range	UHF 480 – 934 MHz
Bandwidth	24 MHz
Channel Set-Up	ACT Sync
RF Output Power	10 - 30mW (country dependent)
Spurious Emissions	< -55 dBc
Max. Input Level	0dBV
Battery	2 AA alkaline or rechargeable batteries
Dimensions	66(W)× 107(H)× 25(D)mm 2.6(W)× 4.2(H)× 1.0(D)"
Weight	Approx. 120g 4.2oz (excluding batteries)

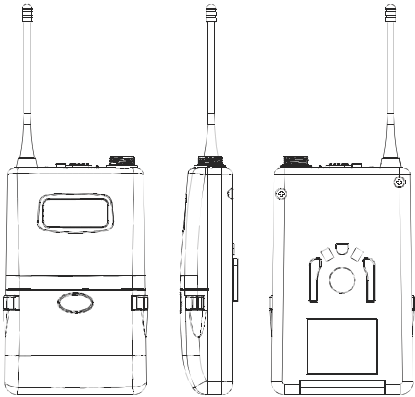

MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw